

ADDENDUM NO. 2

HARRIS COUNTY W.C. & I.D. NO. 136

PROPOSED WATER PLANT IMPROVEMENTS (GROUND STORAGE TANK WITH ASSOCIATED YARD PIPING AND DRAINAGE IMPROVEMENTS)

JOB NO. 113-050, CONTRACT NO. 2

General


The time and date of the Bid Opening is hereby changed to June 30, 2011, 10:00 a.m., the location will not change.

Plans

1. Flexible couplings will be required on all piping (inlet, outlets, and drain).
2. An isolation valve will be required on the tank drain (12" gate valve).
3. The tank manway shall be 30-inches per the specifications.
4. Stainless Steel is acceptable in lieu of carbon steel coated with epoxy for the tank manway.

Specifications

1. Replace Specification Item B320 Special Provision No. 1 with the attached.

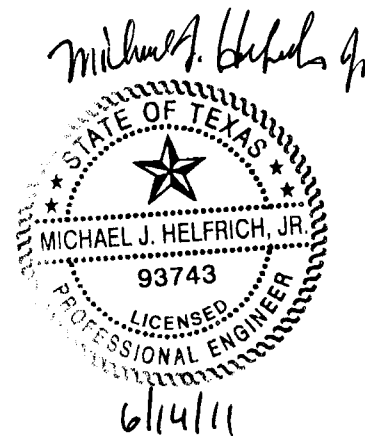

SPECIAL PROVISION NO. 1
TO
ITEM NO. B320

1. Specific Design Data for Section D.4.:
 - a. 420,000 gallons
 - b. 55' dia. x 24' ht.
 - d. As required by ACI 318 and ASCE-7
 - f. Overflow Rate: 1,000 gpm; Withdrawal Rate: 1,500 gpm
 - j. 37 cfs
 - k. 3 cfs